

# Introduction


Techniques to generate cold atom beams are of great interest in a variety of applications, from atomic frequency standards and atom optics to experimental studies of Bose-Einstein condensation. Cold atom beams have been produced by slowing thermal atomic beams using the Zeeman-slowing technique [1] or chirped lasers [2], or using laser-cooling techniques to extract a slow atomic beam from the background gas in a low-pressure vapor cell. These laser-cooling techniques include “atomic funnels” or two-dimensional magneto-optical traps [3–5], as well as a variation of the conventional vapor cell magneto-optical trap called the “low-velocity intense source” (LVIS) [6].

*laser cooling  
trapping*


Variations of the LVIS have been realized with unique trap geometries such as conical [7] or pyramidal mirror traps [8]. The present work implements a simple and robust design based on the pyramidal trap geometry (Fig. 1) and allows use of a single large diameter ( $\leq 20$  cm) laser beam to obtain large capture rates of atoms from the background vapor. The four  $45^\circ$  mirrors are truncated just before the apex of the pyramid, and the  $1\text{ cm}^2$  region at the center of the incident laser beam is retro-reflected by a  $\lambda/4$  plate with a high-reflectance gold coating on the second surface. A small (1 mm diameter) hole in this retro-optic forms an extraction column for the atoms while maintaining a low conductance between the source region and an adjacent UHV chamber.

The characterization of this large pyramidal LVIS will be reported, including an investigation of scaling to very large ( $\geq 10$  cm) high power (~1 W) laser beams which should allow an improvement by a factor of 2–3 in beam flux over previous reports [6]. An atomic beam source which employs Ioffe-Pritchard coils and the same optical geometry to provide transverse two-dimensional confinement within a three-dimensional optical molasses [5] is also being implemented and will be described for comparison.

# Low Velocity Intense Source

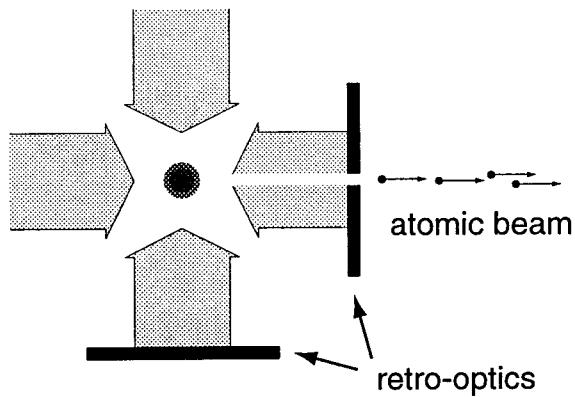


LVIS

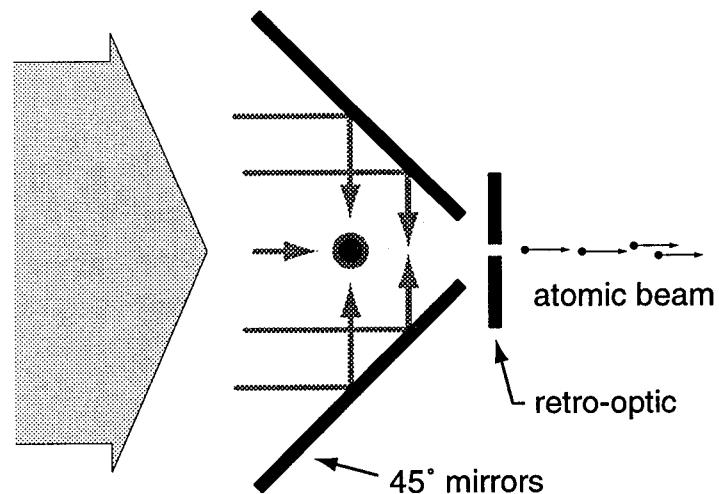


P-LVIS

Lu, *et al.*, Phys. Rev. Lett. **77**, 3331 (1996):

- $v_z = 14 \pm 2.7$  m/s
- flux:  $10^9$ – $10^{10}$  atoms/s
- divergence: 5 mrad ( $\sim 20$   $\mu\text{K}$ )
- brightness:  $5 \times 10^{12}$  atoms/s sr

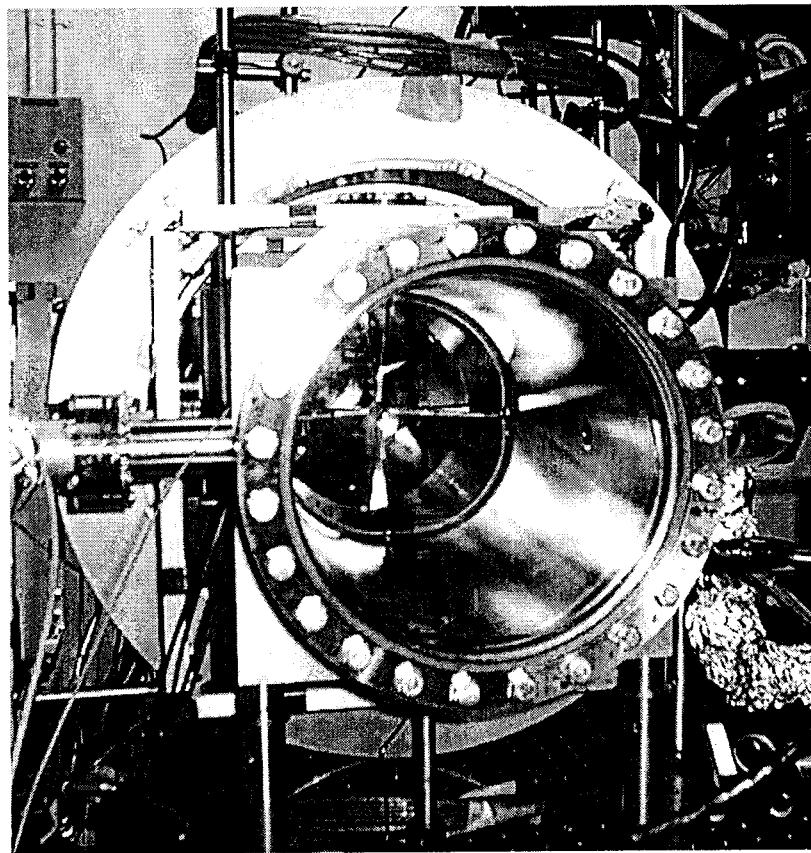

P-LVIS chamber and external coils.

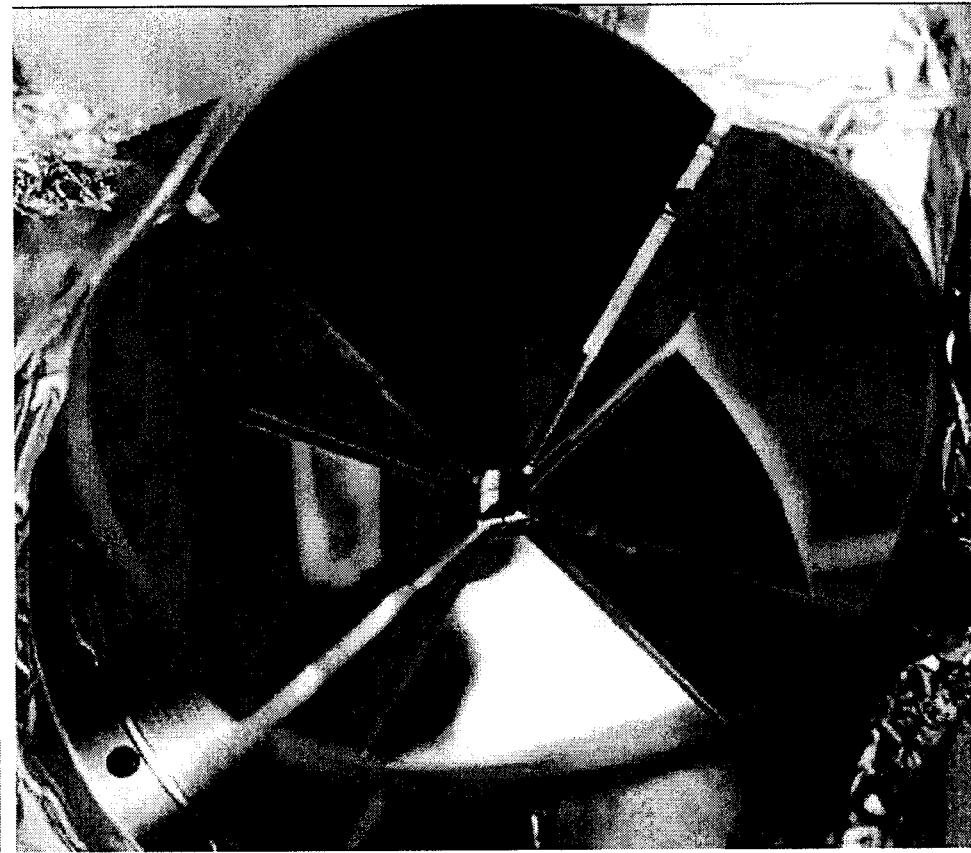

Pyramidal mirror assembly.



**JPL**



Fluorescence image of trapped Cs atoms in pyramidal MOT.

**JPL**

# Atomic beam detection

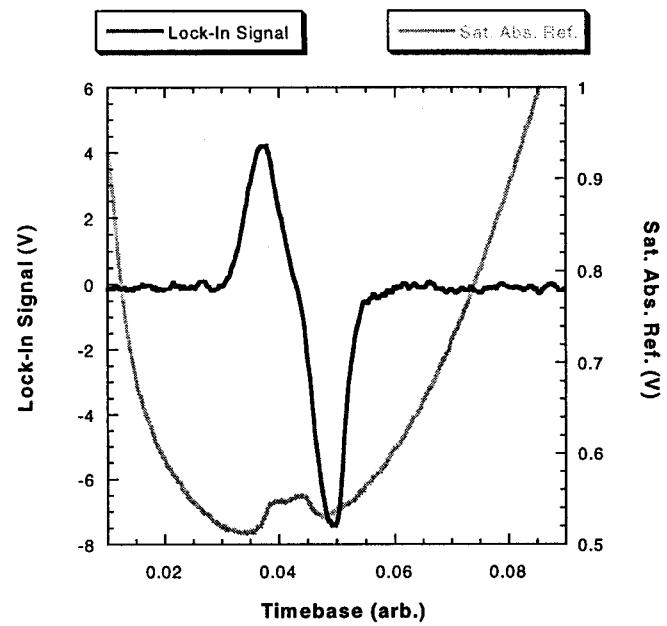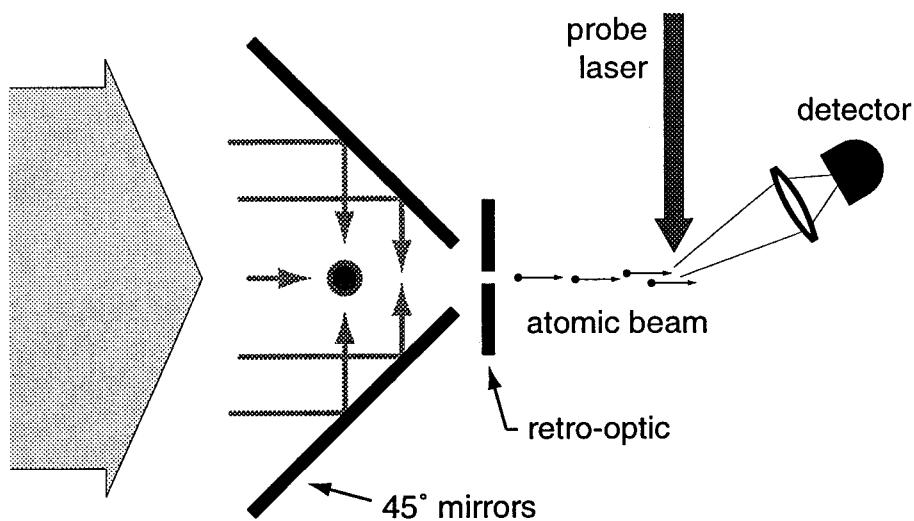

JPL

# **Low Velocity Intense Source:**

## **Further work & applications**

### **Beam characterization**

- Beam flux, longitudinal velocity & divergence ...
- **2D-MOT vs. LVIS** geometry\* — optimize flux & brightness
- Loading efficiency into UHV MOT, optical molasses

### **Future applications**

- Evaporative cooling & BEC
- Load optical molasses from beam to enhance cold atom source for clocks

\* Dieckmann, *et al.*, Phys. Rev. A **58**, 3891 (1998)

# References

1. W. D. Philips and H. Metcalf, Phys. Rev. Lett. **48**, 596 (1982).
2. W. Ertmer, *et al.*, Phys. Rev. Lett. **54**, 996 (1985).
3. E. Riis, D. S. Weiss, K. A. Moler, S. Chu, Phys. Rev Lett. **64**, 1658 (1990); also J. Nellessen *et al.*, Opt. Commun. **78**, 300 (1990); A. Scholz, *et al.*, Opt. Commun. **111**, 155 (1994).
4. P. Berthoud, A. Joyet, G. Dudle, N. Sagna, P. Thomann, Europhys. Lett. **41**, 141 (1998).
5. K. Dieckmann, R. J. C. Spreeuw, M. Weidemüller, J. T. M. Walraven, Phys. Rev. A **58**, 3891 (1998).
6. Z. T. Lu, K. L. Corwin, M. J. Renn, M. H. Anderson, E. A. Cornell, C. E. Wieman, Phys. Lett. **77**, 3331 (1996).
7. J.-A. Kim, K.-I. Lee, H.-R. Noh, W. Jhe, M. Ohtsu, Opt. Lett. **22**, 117 (1997); K.-H. Kim, K.-I. Lee, H.-R. Noh, J.-A. Kim, M. Ohtsu, in *International Quantum Electronics Conference 7*, 1998 OSA Technical Digest Series (Optical Society of America, 1998).
8. R. S. Williamson III, P. A. Voytas, R. T. Newell, T. Walker, Optics Express **3**, 111 (1998).